



Newsletter

Strength test fixture for fire sprinklers EN12259-1 Fig. F.1



THS1730-V1

Max. Load 5kN at 50bar

Standard DIN EN1259-1

Accessories Sprinkler holder inserts

Hydraulic pump



[See datasheet](#)

THS1730-Pu





Hydraulic pump and digital dial gauge

[Click here, to download all images and animations of the listed grips](#)



Sprinkler holder inserts

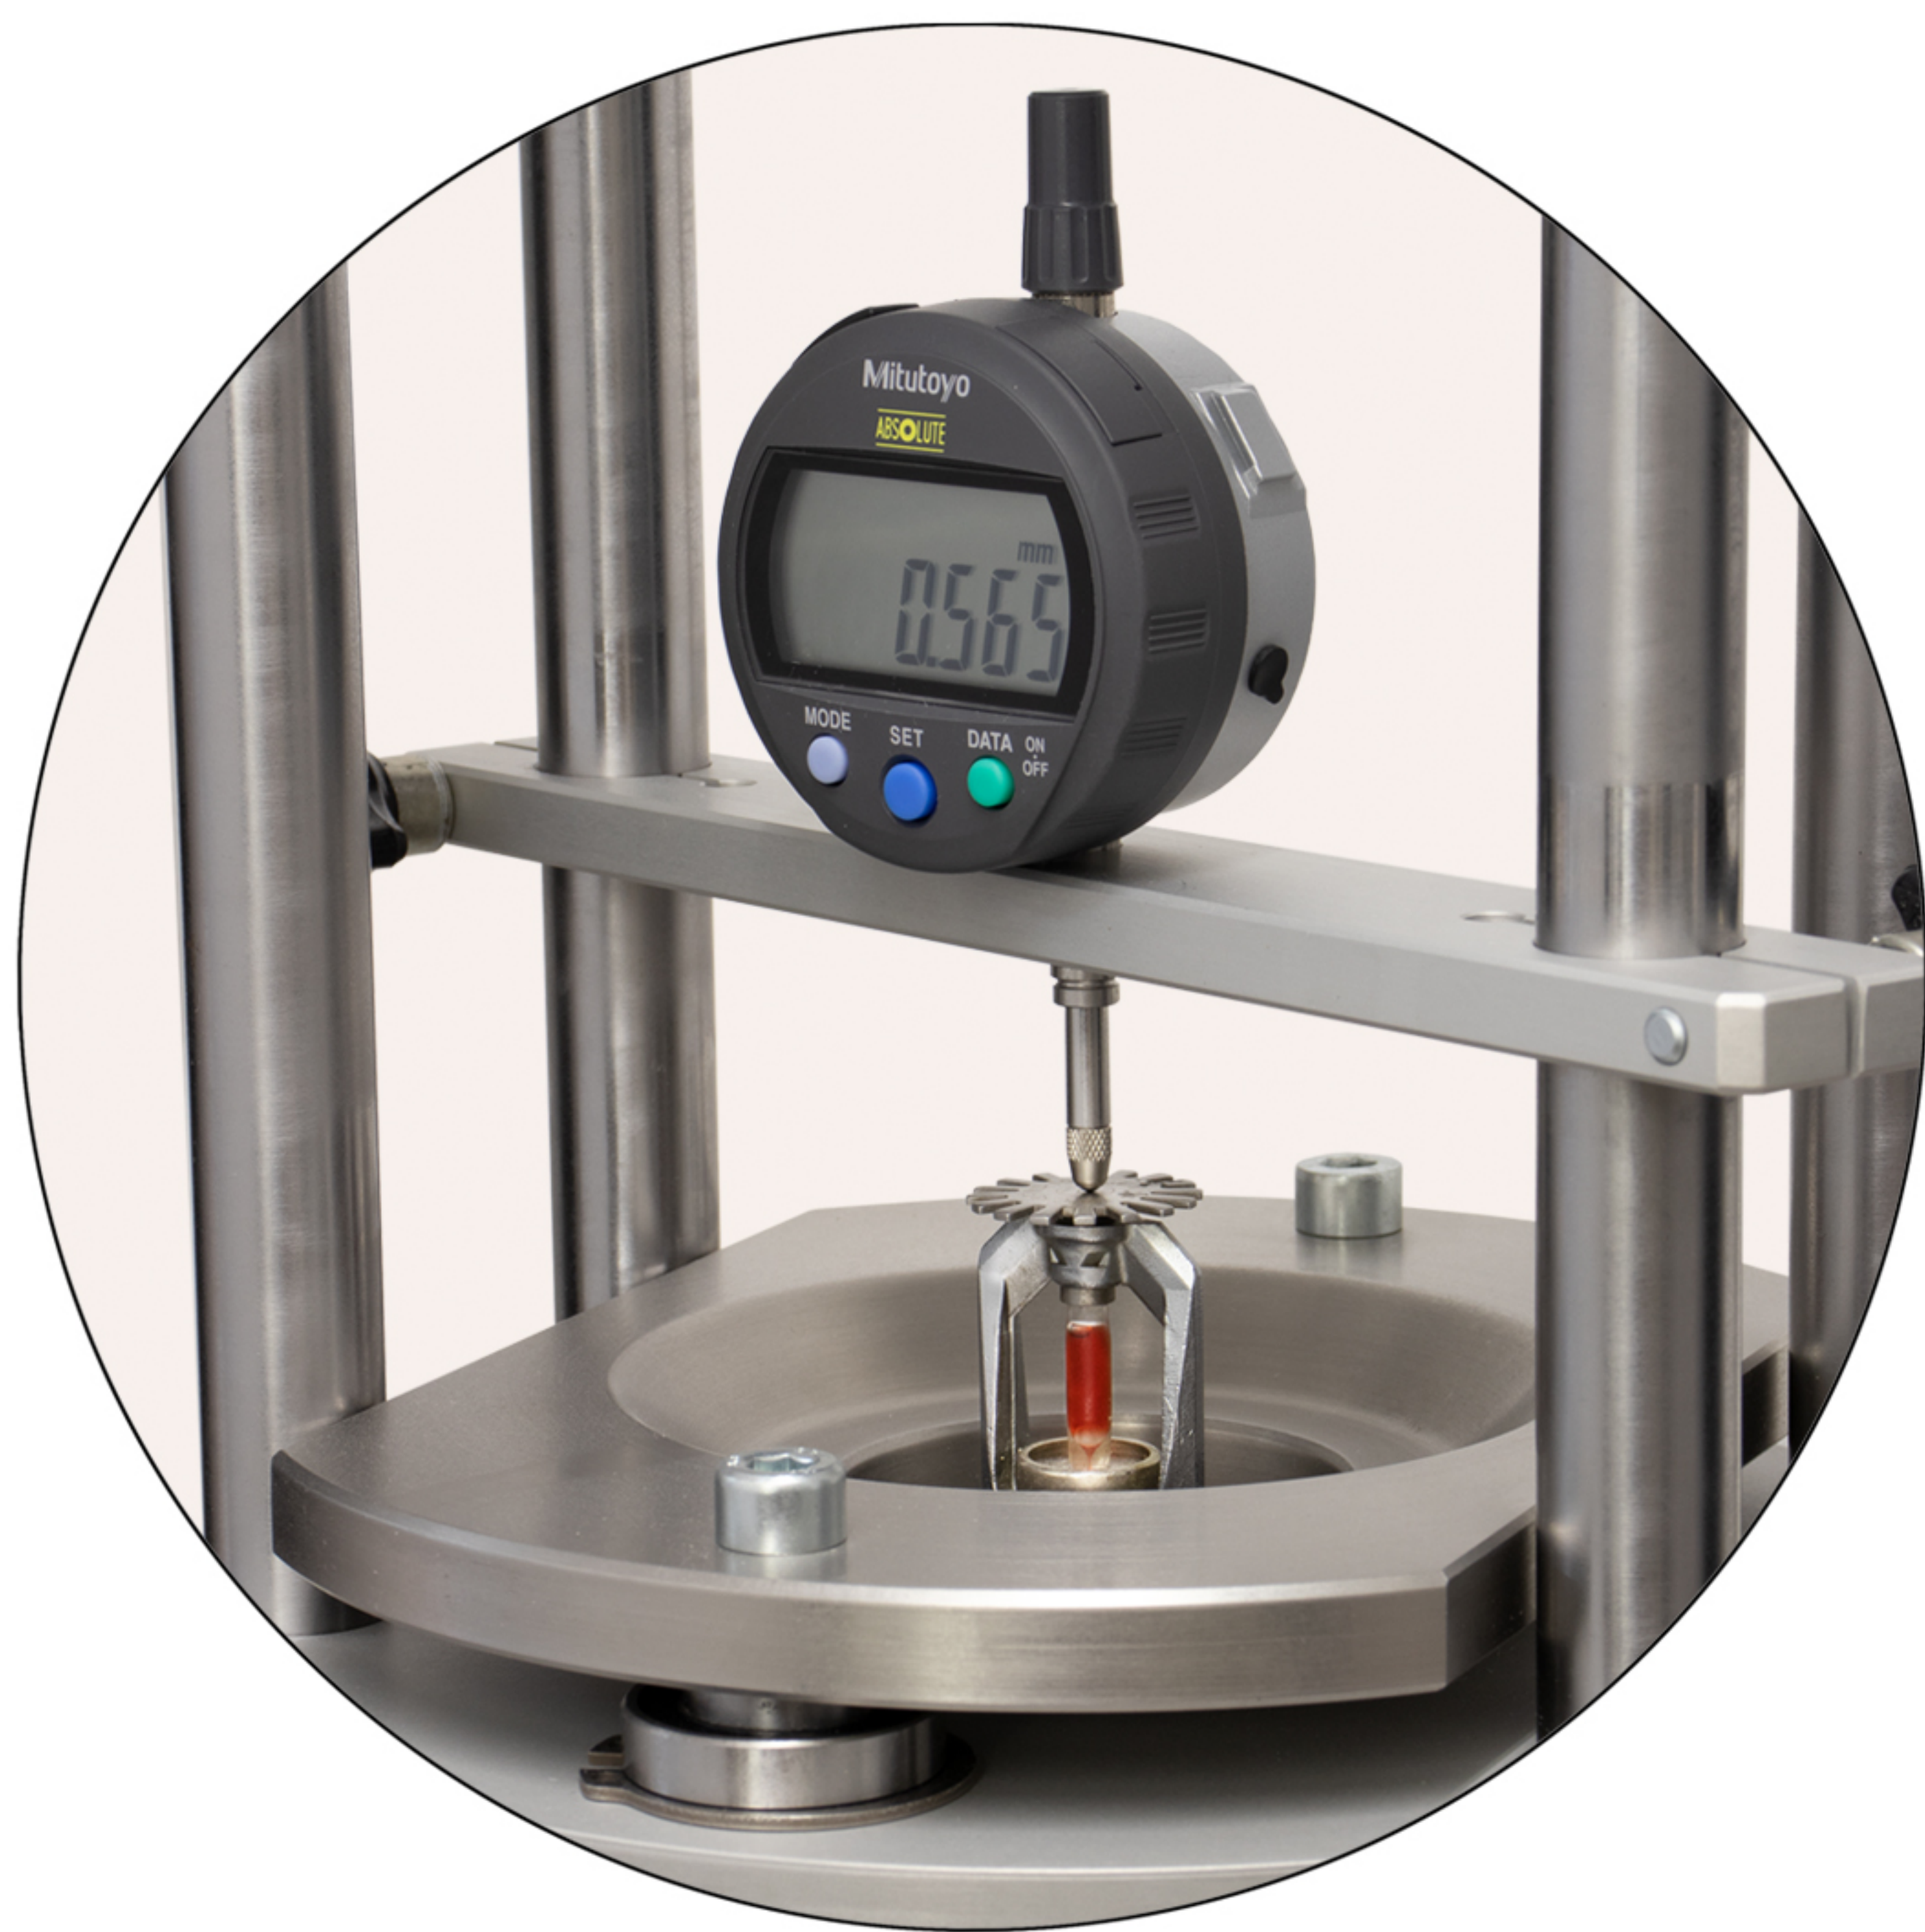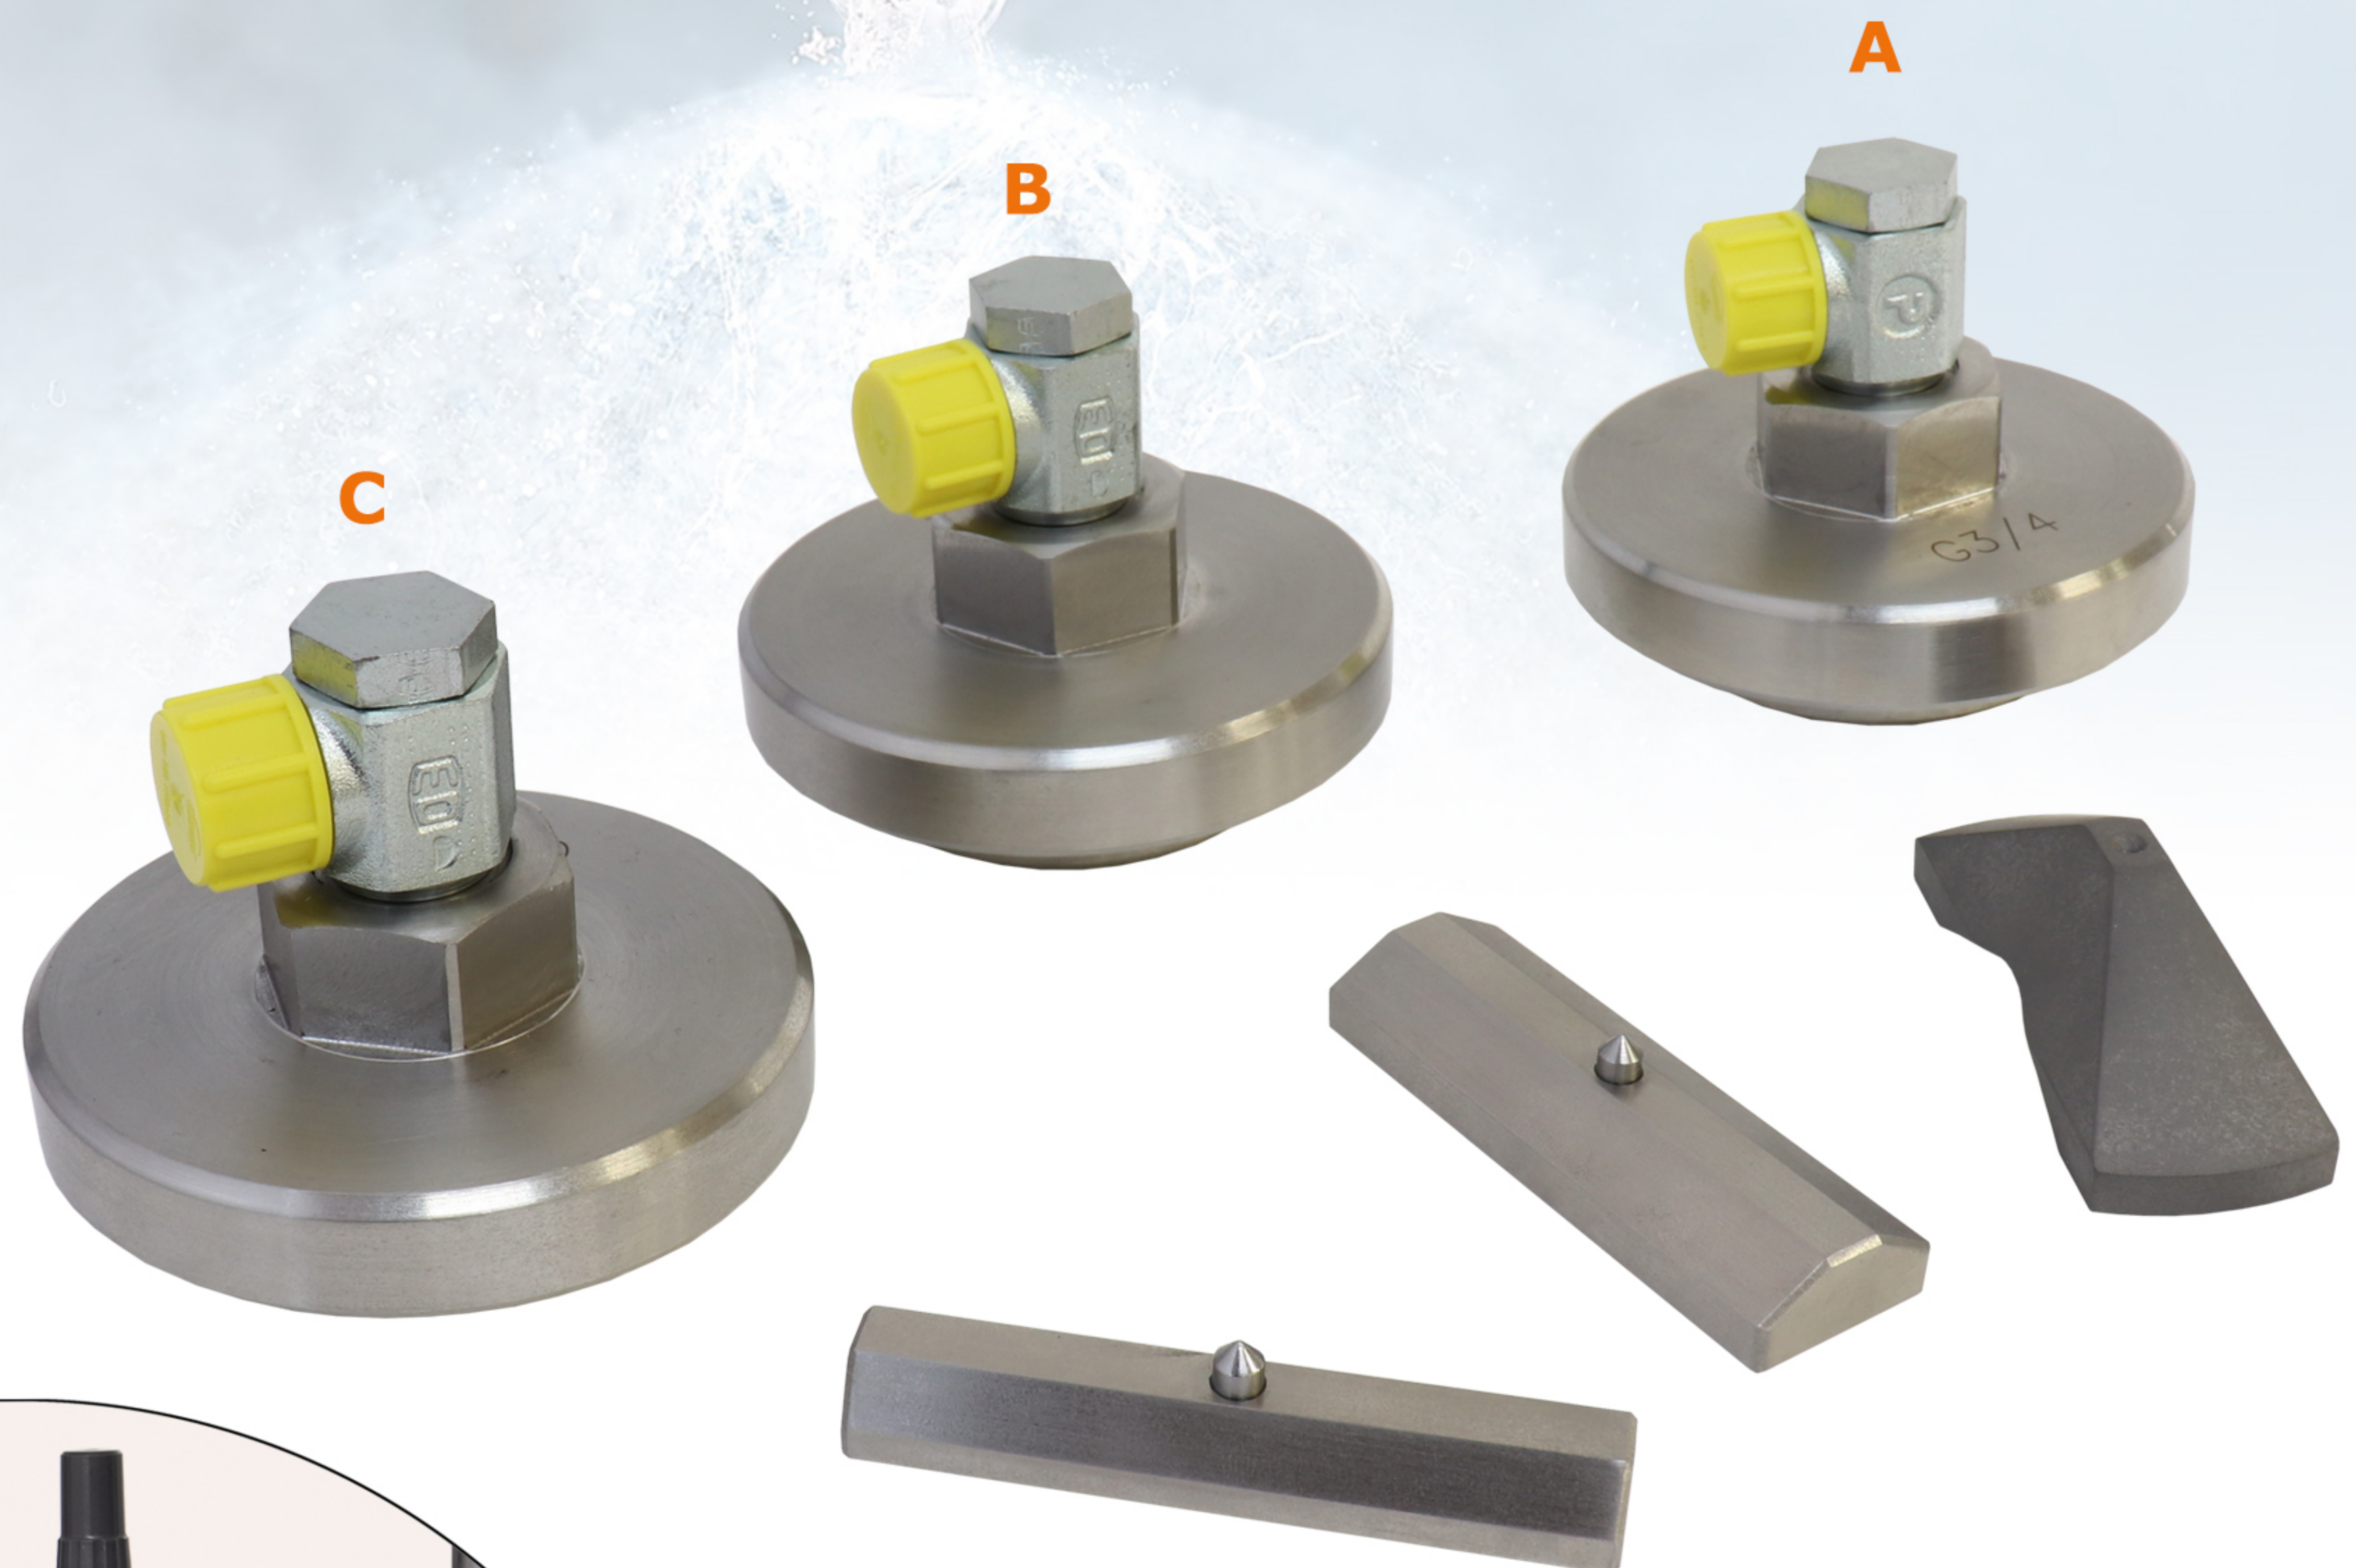

A) THS1730-EG1/2"

Inserts for 1/2" diameter nozzle.

B) THS1730-EG3/4"

Inserts for 3/4" diameter nozzle.

C) THS1730-EG3/8"

Inserts for 3/8" diameter nozzle.



See fixture here on grip.de : <https://grip.de/G16/THS1730-EN12259-1/>