


| | |
|---------------|---|
| TH186 | hydraulic wedge grip - wedge move down or up in case of closing. They create a big axial load. Machine should be able to drive to load 0 during closing the jaws of the second grip to avoid axial load it is not allowed to open grip if sample is under tension load. Max oils pressure to close 250 bar |
| TH186-1000 | 1000 kN hydraulic wedge grip 1 pair |
| TH 186-B.... | Wedge jaws for tension and compression tests and dynamic tests |
| TH186-BP15 | pyramid jaws with wedge for flat samples 0-15mm or round samples 0-15 mm Ø 1 set = 4 parts |
| TH186-BP20 | pyramid jaws 5-20mm with wedge 1set |
| TH186-BP30 | pyramid jaws 15-30 mm with wedge 1 set |
| TH186-BP45 | pyramid jaws 30-45 with wedge 1 set |
| TH186-BP60 | pyramid jaws 45-60 mm with wedge 1 set |
| TH186-BV 5-15 | V-jaws wedge for samples 5-15 Ø mm 1 set for 0-15mm take TH186-BP15 |
| TH186-BV30 | V-jaws wedge for samples 15-30 Ø mm 1 set |
| TH186-BV40 | V-jaws wedge for samples 25-40 Ø mm 1 set |
| TH186-HP | pneumatic hydraulic pump with 4 valves and tubes 0-250 bar oil - pressure clamping force can be easy adjusted via potentiometer or external voltage 0-10 Volt 220Volt 0.1 A |



TH186-1000
+BV35-110

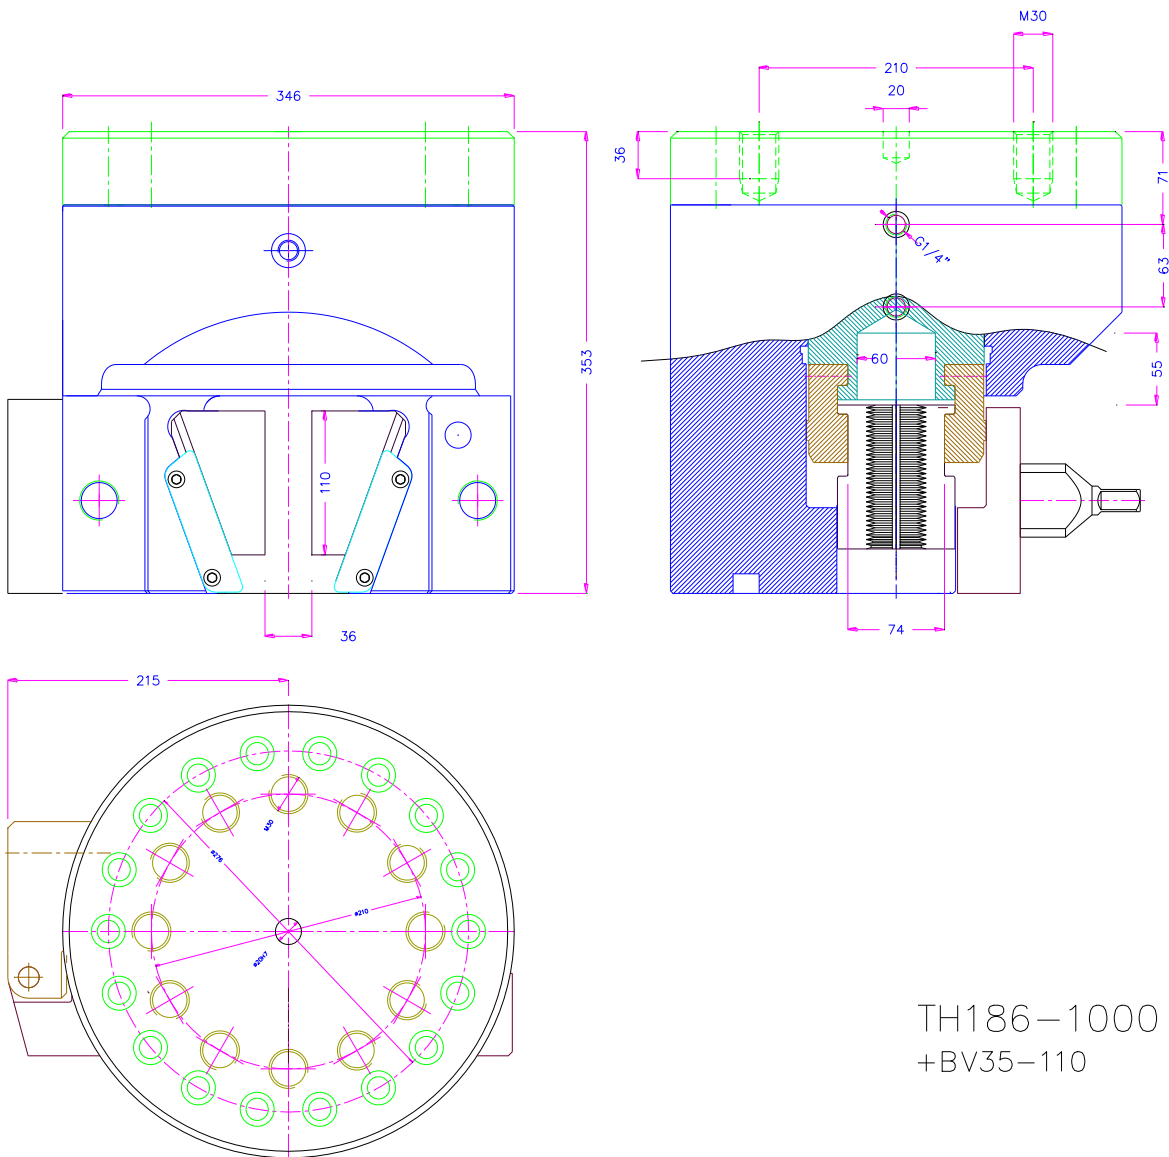

TH186-1000



35mm diameter bar in machine