

CENTERING FIXTURES


THS1514-ISO4624

Centering device according to ISO4624 Fig.3 for ensuring proper coaxial alignment of the test assembly during the adhesion process

THS1514-ISO14916-B1


Equipment for sample preparation for subsequent adhesion strength evaluation, according to ISO14916 Figure B1


For bond strength test fixture see [THS625](#)

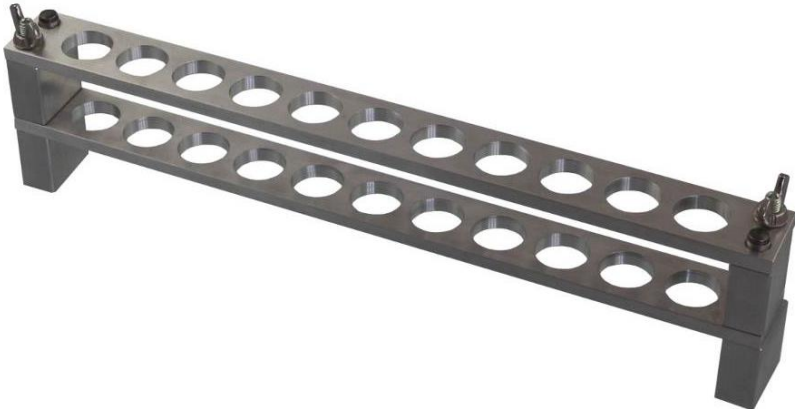

THS1514-ISO4624

Hole diameter 20 mm, height 40 mm
Aluminium

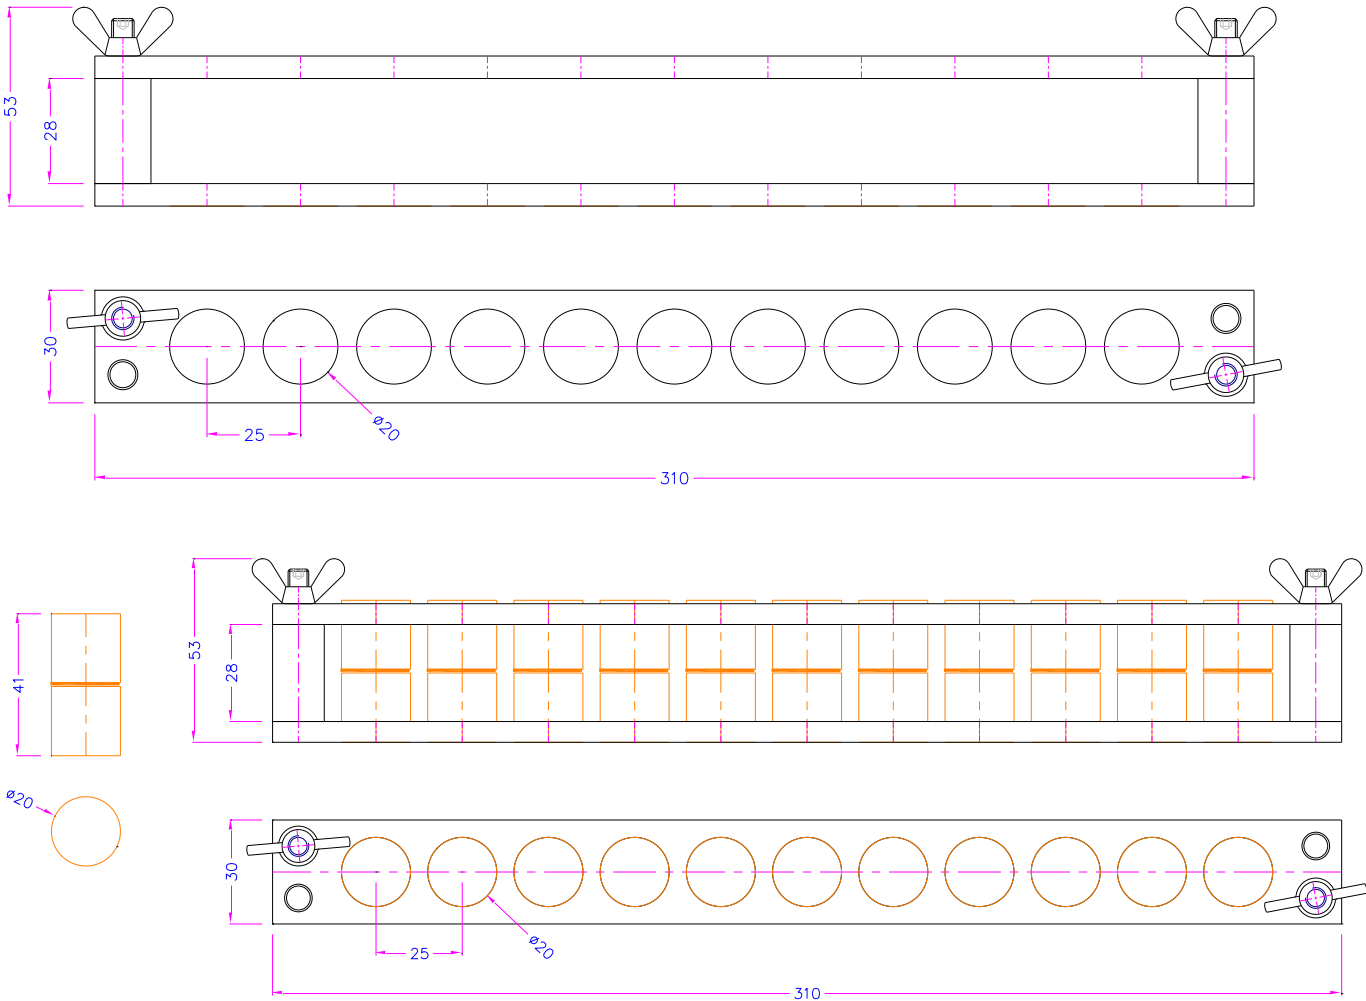

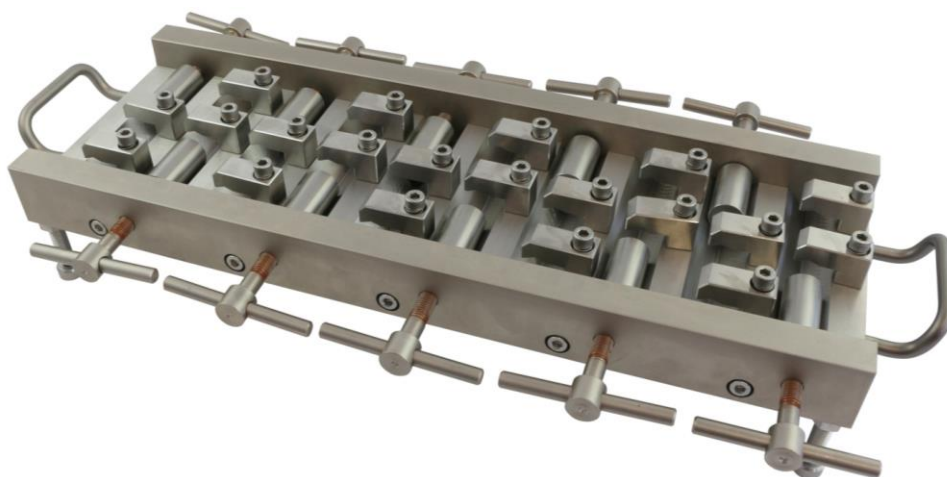

THS1514-ISO14916-B1

Steel

Temperature range 0...+200°C

