
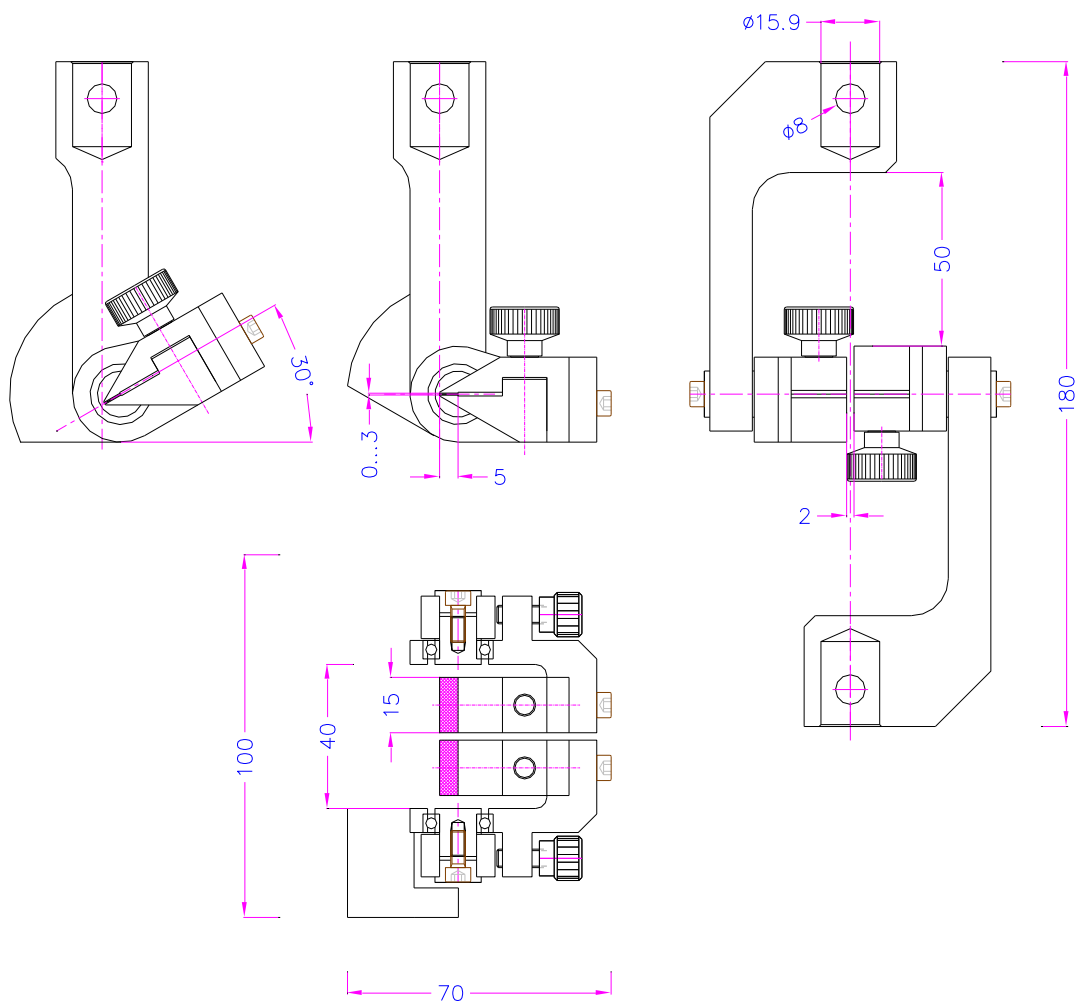
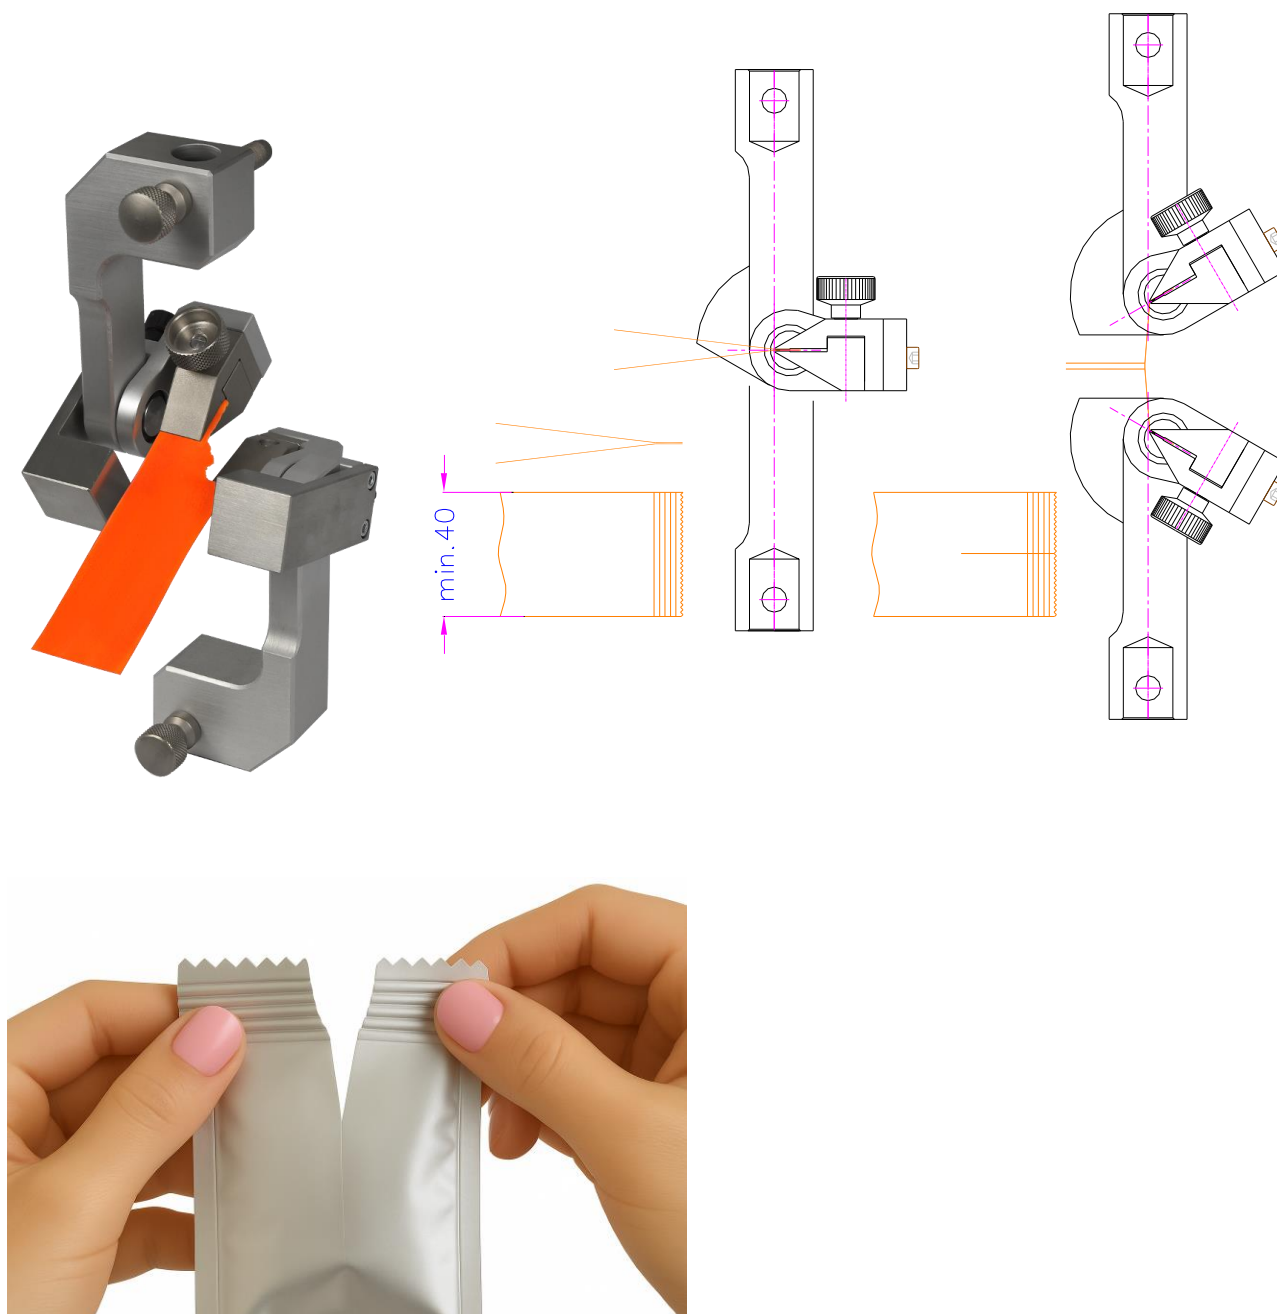



TENSILE PINCER GRIP

to determine the tearing strength of the sachet packaging with serrated or v-notch seals by imitating the movement of human fingers.

Item no.:	THS2093	
Max. load:	20 N	
Coupling:	Af159. Further couplings on request.	
Opening:	0-3 mm	
Clamping surface:	15x5 mm (WxH) Pyramid (serrated) jaws	
Material:	Aluminum, steel	
Temperature range:	0 ... +70°C Further temperature ranges on request.	
Weight:	1 kg per pair of grips	
Scope of delivery:	1 pair of grips	





Check our short  [VIDEO](#) that shows the operation principle of the fixture