


Pneumatic pincer grip 2 kN

Item No.	THS501
Clamping force	2 kN (horizontal)
Opening	0 - 6 mm
Clamping jaws	Pyramid jaws (serrated), 0.8 x 45°
Clamping surface H x W	5 x 5 mm
Temperature range	0°C up to +70°C Further temperature ranges on request
Body	Aluminum, anodized
Pneumatic connection	1/8" internal thread
Weight	0.8 kg (incl. jaws)
Scope of delivery	1 grip incl. pyramid jaws



Similar grips

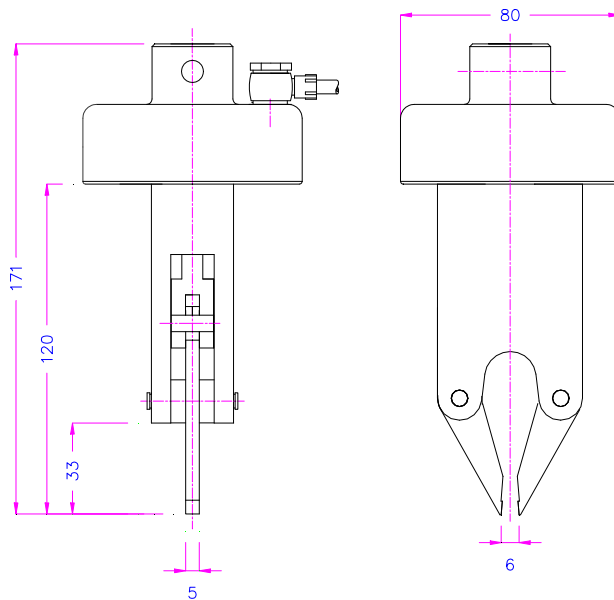

[THS341](#)



[THS7](#)



[THS205k](#)



[THS470](#)

Accessories:



TH205-1

2 pneumatic foot switches, tubes and fittings

None locking: The jaws of the grip open by pressing the foot pedal and close after removing the foot from the pedal.

Scope of delivery: 1 pair of foot switches including tubes and fittings



TH205-2

2 pneumatic foot switches, tubes and fittings

With locking function: The jaws of the grip open by pressing the foot pedal and remain opened after removing the foot from the pedal. The jaws close by pressing the pedal one more time.

Scope of delivery: 1 pair of foot switches including tubes and fittings



TH205-. +PR

Optional for TH205-1 or TH205-2

Pressure regulator

To adjust air pressure: 1-10 bar



TH205-3

1 unit of pneumatic hand switches, tubes and fittings

With locking function: Handle with 2 positions. The jaws of the grip close by pulling the handle and remain closed. The jaws open by pushing the handle back.

Scope of delivery: 1 unit of hand switches including tubes and fittings



TH216

Silent compressor appropriate for laboratories

Max pressure: 16 bar; noise level: 45dB(A)

Motor 400 watt; displacement 25 l/min

With pressure reducer / water trap

Dimensions: 382x300x334 mm (L x W x H), tank size 4 litres, Weight ~ 23 kg