



THS565

Chuck grip


Closed support
Spherical seated

hardened

Scope of delivery 1 pair

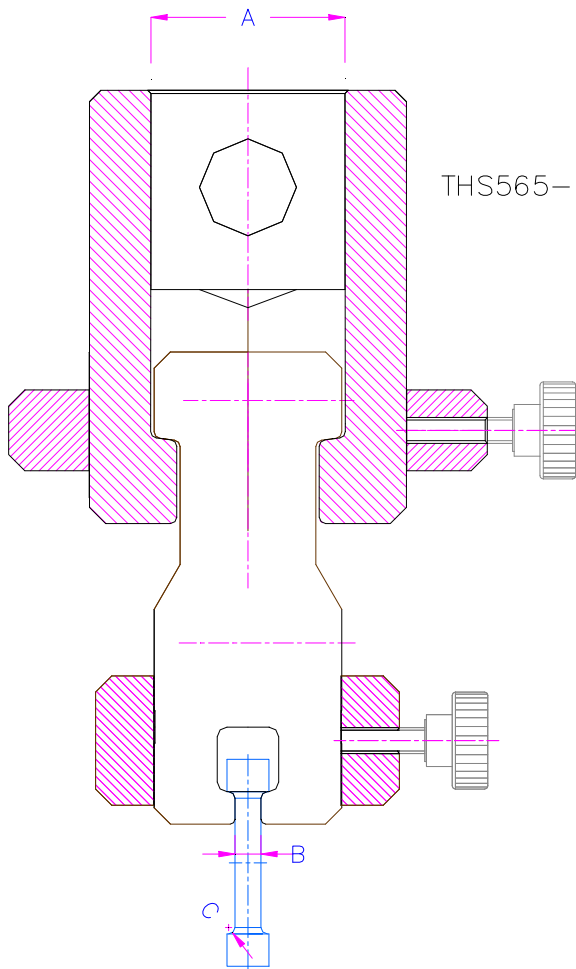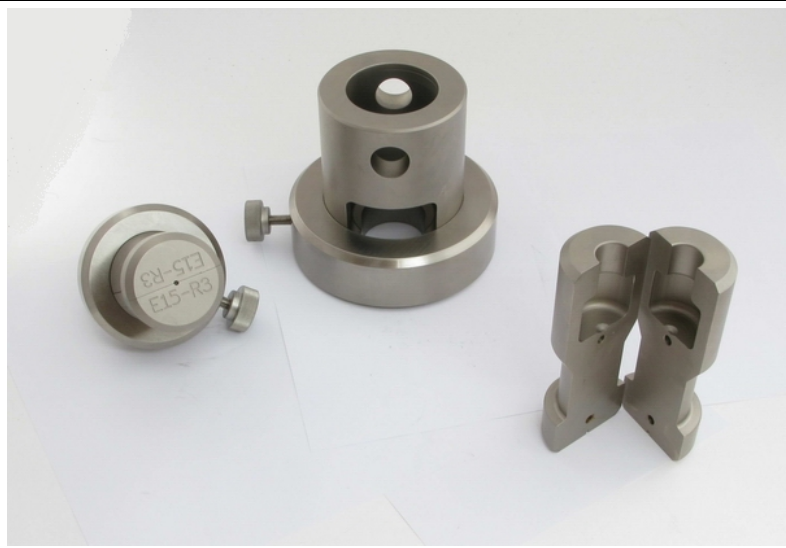

THS565-A..

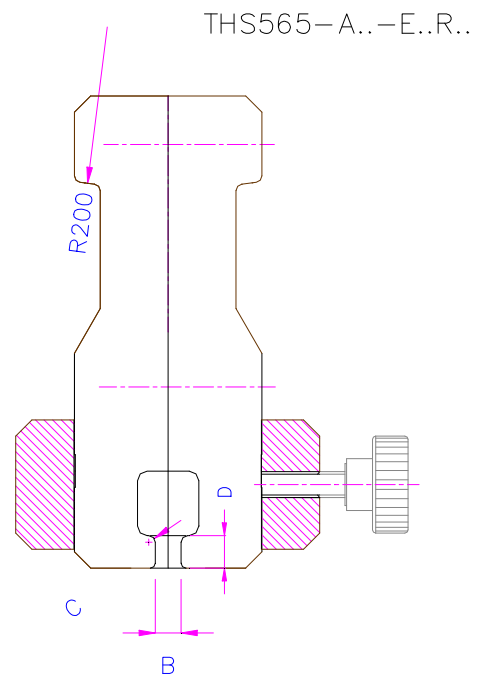

THS565-A..-E..R..

THS565-A..-EB-RC-D

THS565-60-GT



Adapter 60 mm diameter
Nickel coated
F max 300 kN
Weight 4.5 kg



THS565-60-E5R1.5-Ni

Insert for chuck 2 half parts
per set
nickel coated


THS565-60 + E8R2-10
Insert for chuck 2 parts ↓

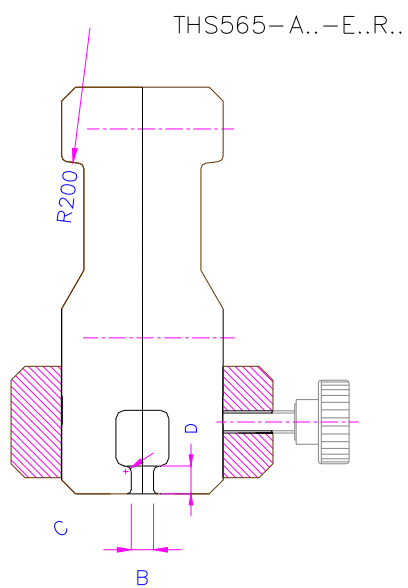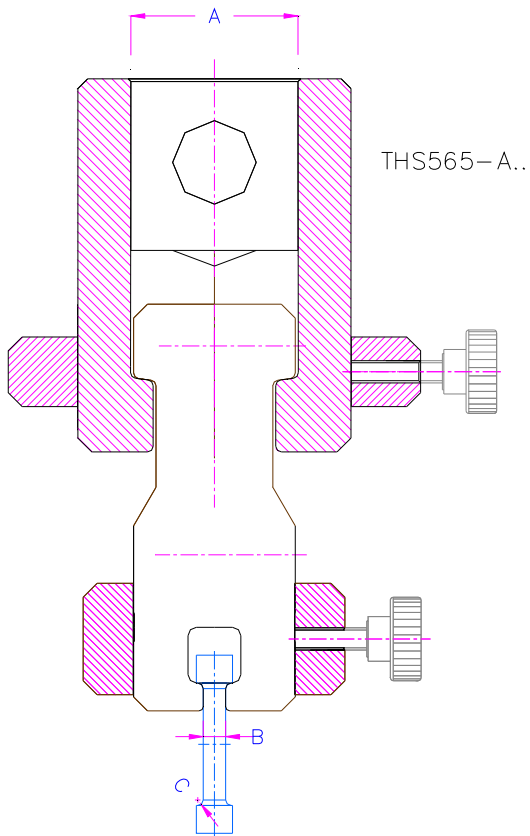

THS565-A..-EB-RC-D

THS565-60-EM10
THS565-60-EM12x1.75
THS565-60-EM16x2


Weight 2.5 kg


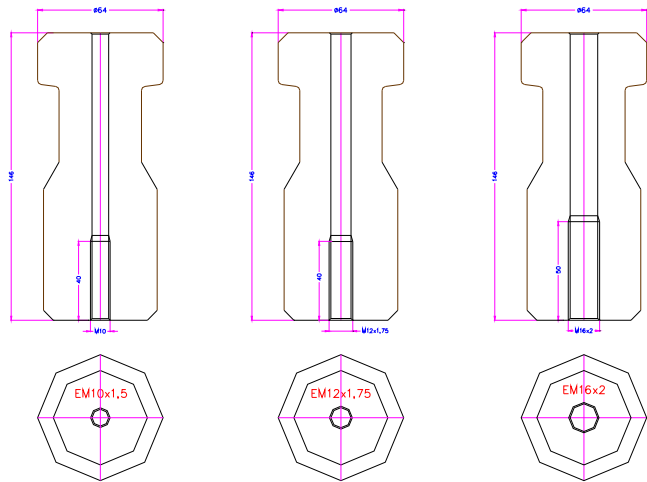


THS565-60-ETr16x2

2 parts



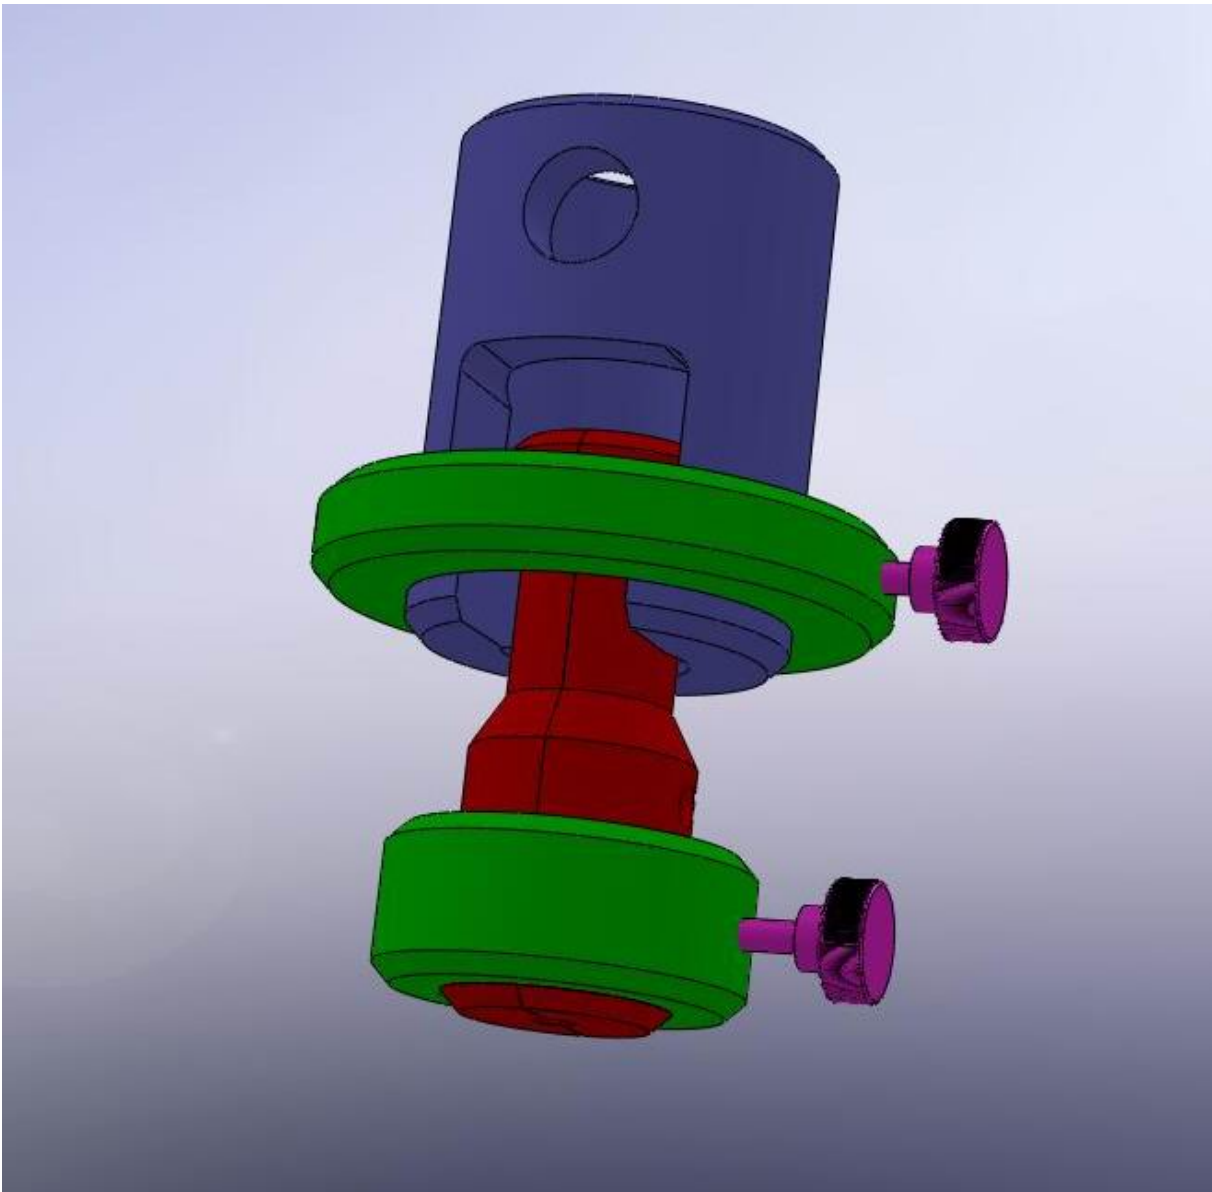

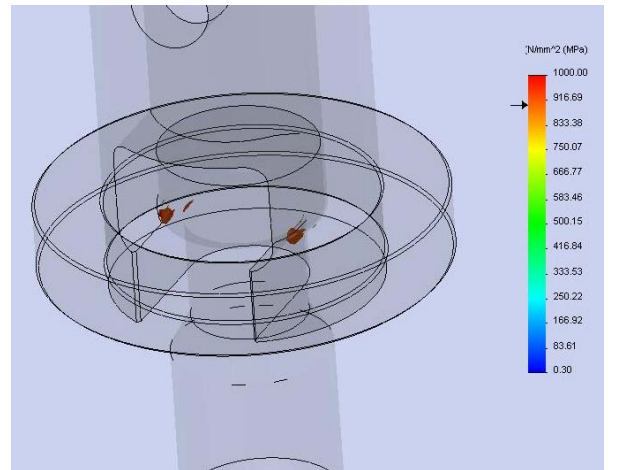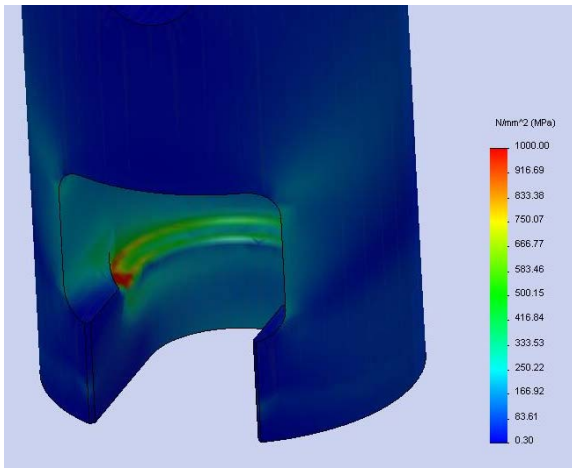

THS565-60-GT
 max Tension 900N/qmm (max force = 250kN)
 Material 1.2842 (HRC42)

$R_{p02} \approx 900\text{N/qmm}$; $R_{max} \approx 1350\text{N/qmm}$