



## Shear test fixture ASTM D7078

Standard Test Method for Shear Properties of Composite Materials by V-Notched Rail Shear Method

|                    |   |
|--------------------|---|
| Item-No.:          | THS722-ASTMD7078  |
| Force capacity:    | 50 kN   |
| Standard coupling: | Af318 mm<br>Further couplings on request                      |
| Body:              | Steel   |
| Jaws:              | Hardened steel 58 HRC,<br>pyramid (serrated) clamping surface |
| Weight per grip:   | 4 kg  |
| Scope of delivery: | 1 pair of grips incl. 2 nylon positioning tools               |

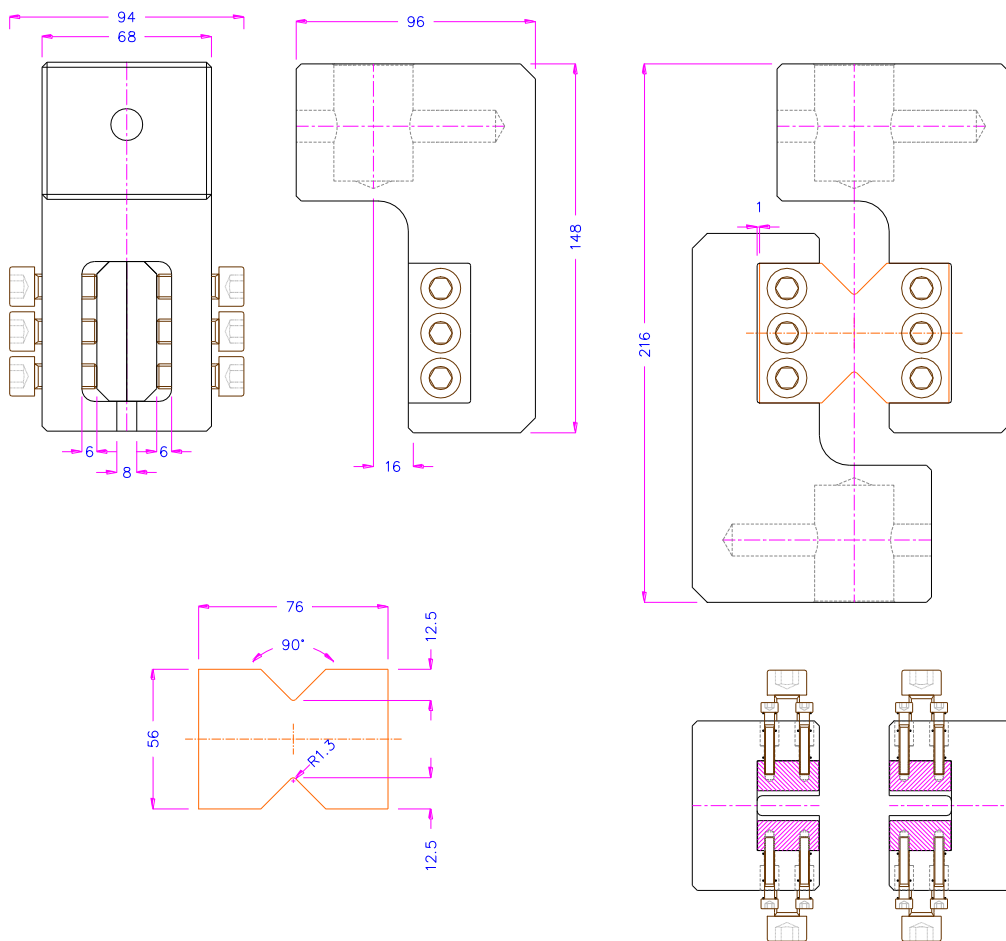

Pyramid (serrated) jaw surface. Pyramids 1.2x45°

See also [THS600 ASTM D5379](#) (The Iosipescu V-notched beam shear test fixture)

