


Shear test fixture ASTM D7078

Standard Test Method for Shear Properties of Composite Materials by V-Notched Rail Shear Method

Item-No.:	THS722-ASTMD7078
Force capacity:	50 kN
Standard coupling:	Af318 mm Further couplings on request
Body:	Steel
Jaws:	Hardened steel 58 HRC, pyramid (serrated) clamping surface
Weight per grip:	4 kg
Scope of delivery:	1 pair of grips incl. 2 nylon positioning tools

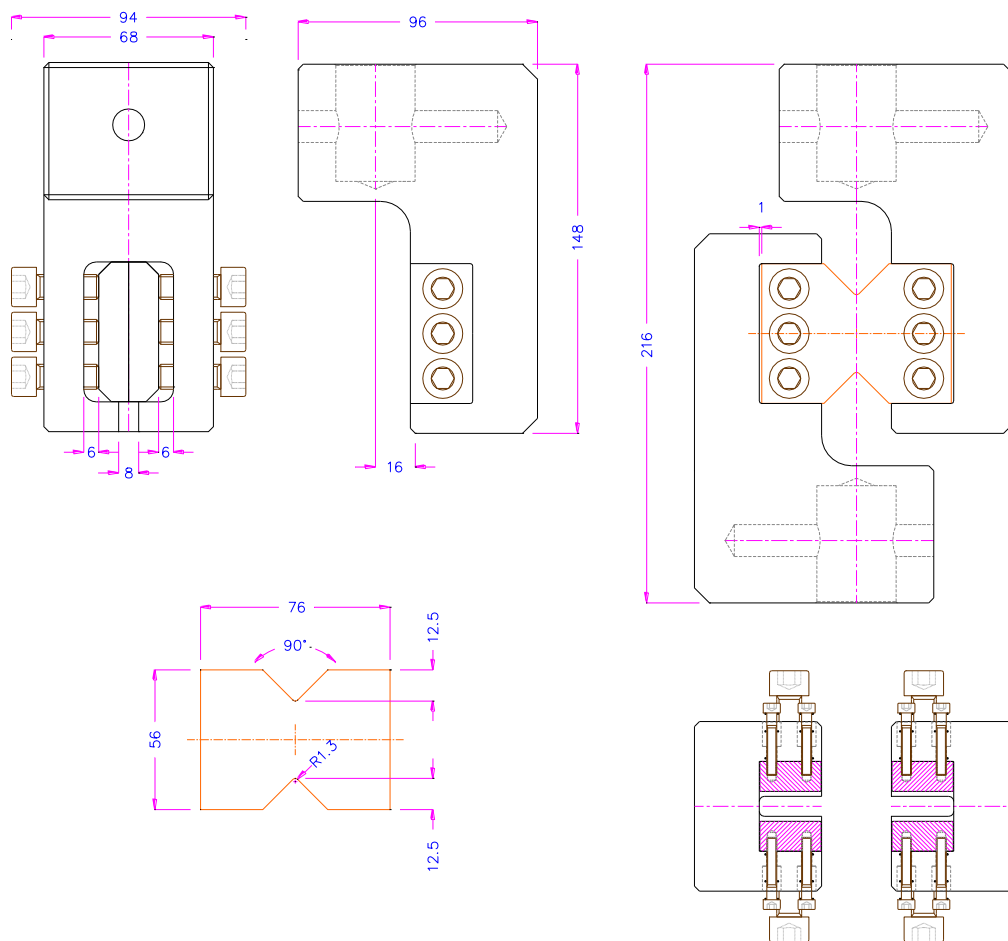

Pyramid (serrated) jaw surface. Pyramids 1.2x45°

See also [THS600 ASTM D5379](#) (The Iosipescu V-notched beam shear test fixture)

