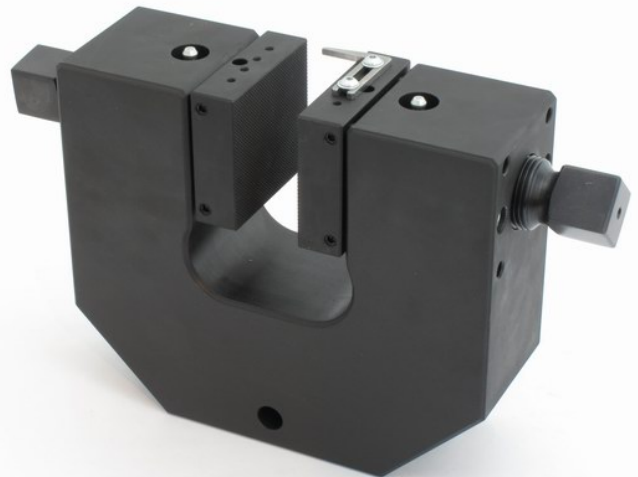


Vice grip 50kN

Ordering information:

The grips are ordered in pairs but can also be ordered separately (0.5 pair). Grips and jaws need to be ordered separately.






We recommend the usage of an air screwdriver.



Item number	THS90
Tensile force	50 kN
Temperature range	0°C - +180°C Other temperature ranges on request
Body	Steel, manganese phosphate coating
Weight	12 kg each grip (without jaws)
Scope of delivery	1 pair of grips

Jaws for THS90: Scope of delivery: 1 set = 4 jaws

Item No.	Surface	Clamping surface H x W	Opening	Weight per pair
THS90-B	Blank (smooth) jaws	60 x 66 mm	0 – 30 mm	1.2 kg
THS90-BP	Pyramid jaws (serrated)	60 x 66 mm	0 – 30 mm	1.1 kg
THS90-BV	V-jaws	60 x 66 mm	5 – 30 mm Ø	1.1 kg
THS90-BW	Wave jaws	60 x 66 mm	0 – 30 mm	1.1 kg
THS90-BD	Diamond jaws	60 x 66 mm	0 – 30 mm	1.1 kg
THS90-B210	Blank (smooth) jaws	70 x 210 mm	0 – 10 mm	6.6 kg
THS90-BP210	Pyramid jaws (serrated)	70 x 210 mm	0 – 10 mm	6.6 kg
THS90-BW210	Wave jaws	70 x 210 mm	0 – 10 mm	6.4 kg

	Blank jaws <ul style="list-style-type: none"> • Suitable for own further treatments • Steel-blanks without coating
	Pyramid jaws <ul style="list-style-type: none"> • Pyramids 1.2x45° • Hardened steel 58HRC manganese phosphated
	V-jaws <ul style="list-style-type: none"> • For all kinds of round samples • Tooth pitch 1.2 mm • Hardened steel 58HRC manganese phosphated
	Wave jaws <ul style="list-style-type: none"> • For flexible materials • Wave 5 mm • Hardened steel 58HRC manganese phosphated
	Diamond jaws <ul style="list-style-type: none"> • Clamping surface coated with synthetic diamonds • Nickel-plated

Jaws with other dimensions and surface coatings on request

