






3-POINT BEND TEST FIXTURE

to test metallic materials according to VDA238-100: (2010) and DIN EN ISO7438 for smaller samples.
For version 2020, please request an offer for *TH22St-240-FV-D30-M20-svo*

Item no.:	TH103-FV-VDA238-100 (2010)
Max. load:	20 kN*
Coupling:	Af159 or Af20 Further couplings on request
Material:	Steel, nickel-plated Upper anvil and lower rollers hardened
Temperature range:	0 ... +70°C Further temperature ranges on request
Weight:	8.84 kg per fixture incl. 1 upper anvil
Scope of delivery:	1 fixture including: 1x lower bar 220 mm long 1x upper anvil with radius 0.2 mm 1x upper anvil with radius 0.4 mm

*50 kN possible on request.

Generally, we recommend *TH22St-240-FV-D30-M20-svo* (2020) for 50 kN (see page 2).

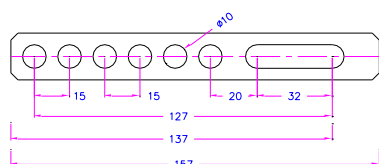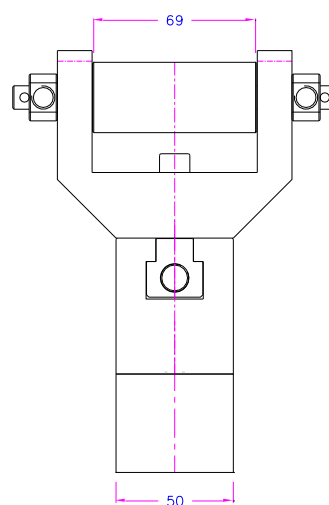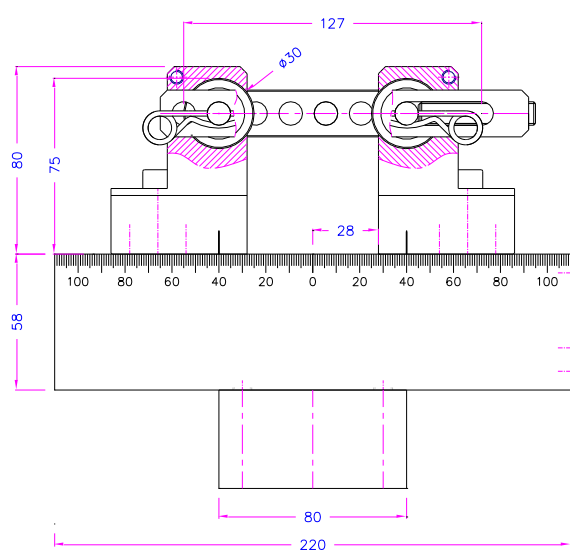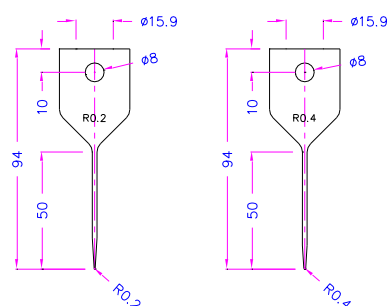

The upper anvils can be ordered separately:


Item no.:	Radius:
TH103-FV-FoR02	0.2 mm
TH103-FV-FoR04	0.4 mm

Anvils with further radii on request



The centric gear with a crank can be ordered separately:

Item no.:
TH103-cgr220

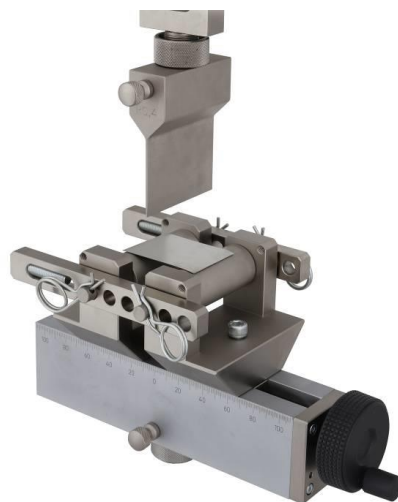

See also:



TH22St-240-FV-D30-M20-svo (2020)
[TH22-VDA238-2020 Datasheet.pdf](#)