

### PEEL TEST FIXTURE

for testing resistance of adhesive bonds according to ASTM D3167, DIN 53289, EN 1464, ISO 4578.



Max. load:	10 kN
Coupling:	Af159. Further coupling sizes possible with additional adapter
Body:	Steel, nickel-plated
Temperature range:	0 ... +70°C Further temperature ranges on request
Scope of delivery:	1 fixture. Additional lower grip is required (not included in the price)



**Item no.:** TH105-D254-B254

Peel Test Fixture for Testing Floating Roller Peel Resistance of Adhesives according to ASTM D3167

Roller diameter:	25.4 mm (1 in.)
Roller width:	25.4 mm (1 in.)
Weight:	0.68 kg

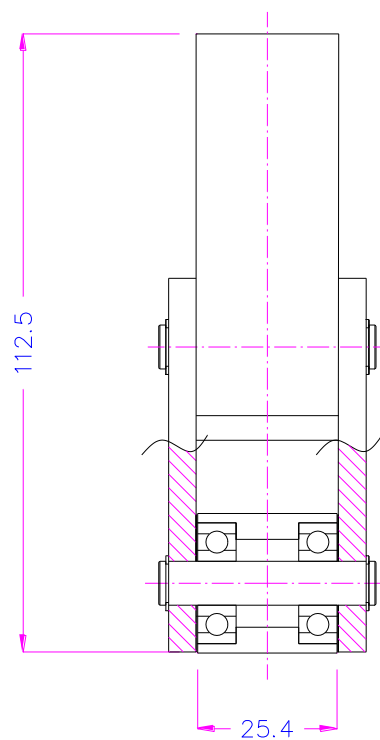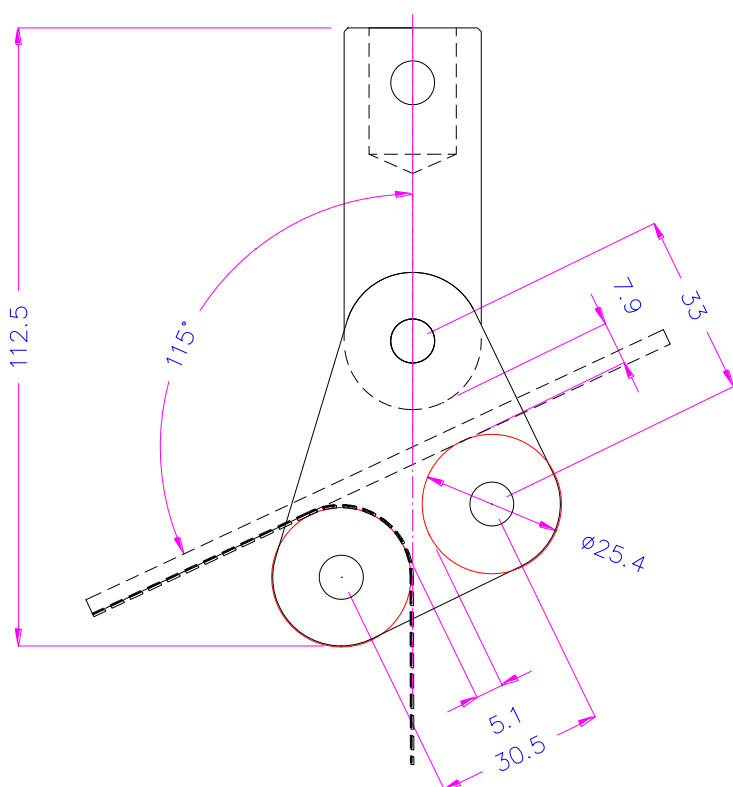

TH105-D254-B254-ASTM-D3167



**Item no.: TH105-D25-B30**

Peel Test Fixture for Testing Floating Roller Peel Resistance of Adhesives according to DIN 53289, EN 1464, EN2243-2, ISO 4578

Roller diameter: 25 mm

Roller width: 30 mm

Weight: 0.60 kg

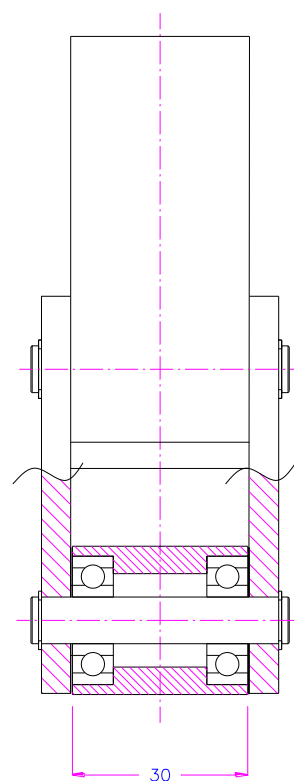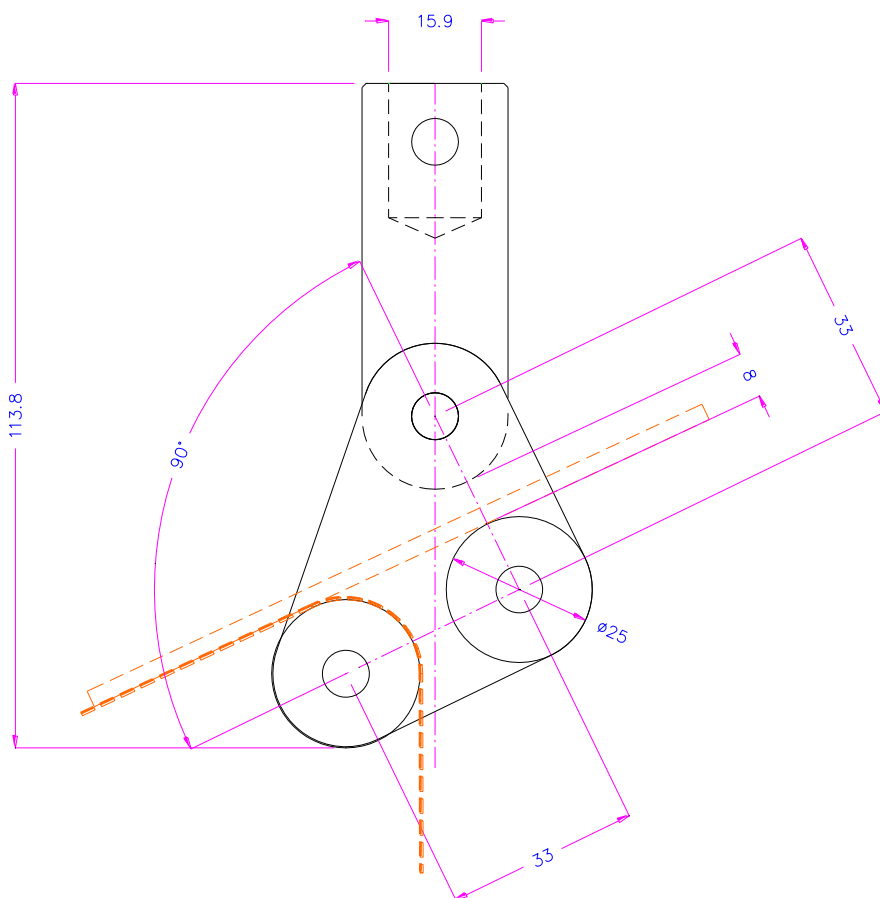

TH105-D25-B30

For the lower grip we recommend TH240k+BP



See [www.grip.de/G06/TH240k](http://www.grip.de/G06/TH240k)