


WIRE TERMINAL GRIPS


for measuring pull strength of wire terminals and connectors.
Self-aligning wheel with equally spaced slots for standard terminal shank sizes.

Item no.:	THS314-60
Max. force capacity:	20 kN
12 slots:	1 - 1.2 - 1.6 - 2 - 2.4 - 2.7 - 3 - 4 - 4.5 - 5 - 5.5 - 6 [mm]
Coupling:	Af15.9 mm. Further coupling sizes on request
Body:	Steel, nickel-plated
Temperature range:	0 ... +70°C
Weight:	0.7 kg
Scope of delivery:	1 grip incl. locking pin

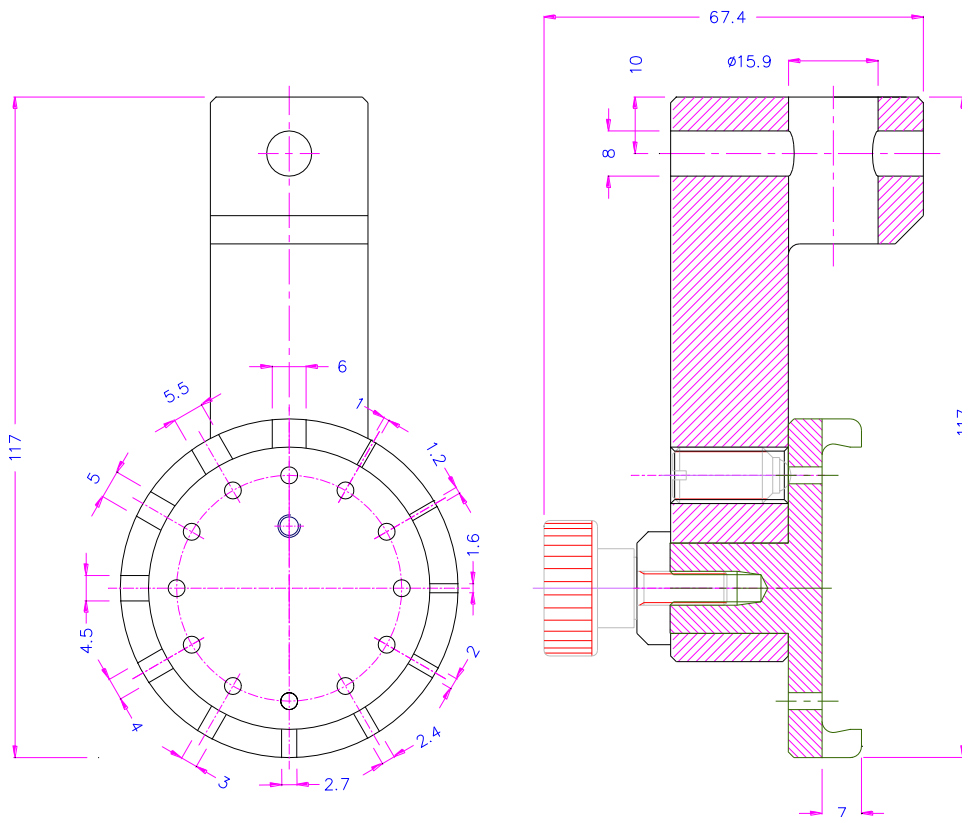


THS314-60

Item no.:	THS314-150-S2
Max. force capacity:	20 kN
8 slots:	2.6 – 3 – 4 – 5 – 6 – 8 – 10 – 11.8 [mm]
Coupling:	Af15.9 mm. Further coupling sizes on request
Body:	Nickel-plated steel
Temperature range:	-70 ... 280°C
Weight:	2.9 kg
Scope of delivery:	1 grip incl. locking pin

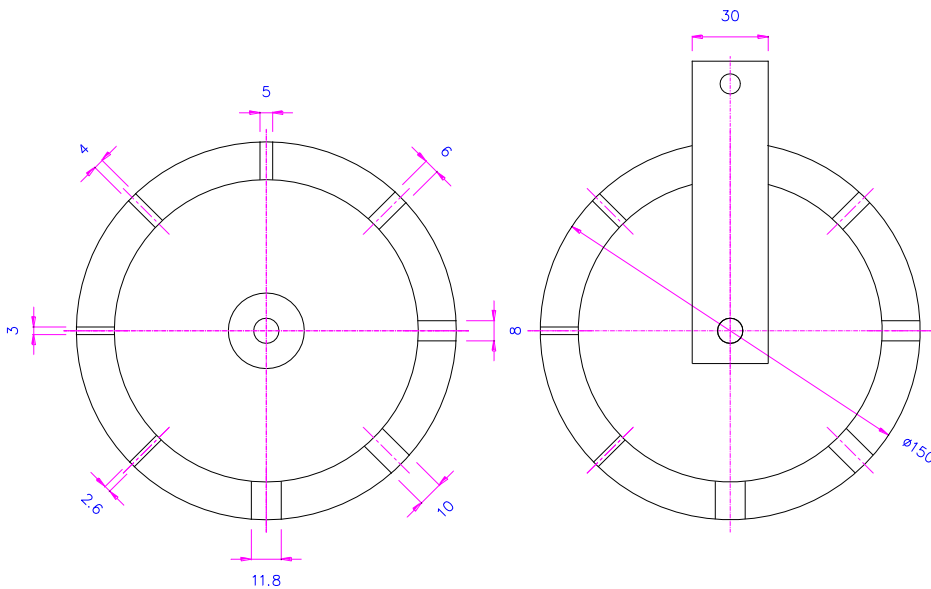

THS314-150-S2

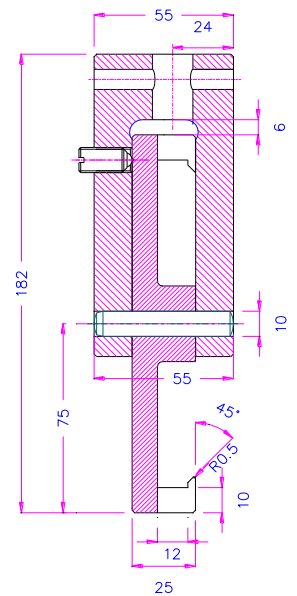

Example for a customized solution:**THS314-240-S1**

Rotatable ring 240 mm \varnothing , 20 kN, customized slot sizes

**THS314-200-SM1**

Special fixture for samples 1-18, 20-36, 38 mm

Videos:

<https://www.youtube.com/watch?v=9HWI9cNOnPM>
8 kN


<https://www.youtube.com/watch?v=y9BRmcYZtmQ>
9 kN

https://www.youtube.com/watch?v=Pfdql7sW_R0
2 kN



THS314-200-SM1

Video:

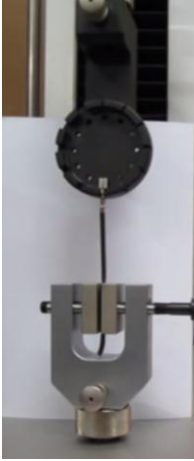

[Wire terminal strength testing](#)

To hold the wire we recommend [TH76](#), [TH170](#), [THS255](#), [TH240k](#), [TH240g](#)



THS314-60 and [TH240k+BP](#)



THS314-150-S2 and [TH76-20](#)