

KRAMER SHEAR TEST FIXTURE

Shear test fixture to test firmness of fruits, vegetables, meats and other foods. The specimen is placed into the cell and cut through by the blades.

Artikel-Nr.	THS799-70-10B3X3+Gde
Max. load:	20 kN
Coupling:	Af159 or internal thread Km8. Further couplings on request
Cell size:	70x70 mm
Blades:	10x 3 mm thick. Distance between blades: 3 mm
Material:	Stainless steel, aluminium, Plexiglas
Temperature range:	-30 +70°C (full stainless steel version: -80 +180°C)
Weight:	9.6 kg per complete fixture
Scope of supply:	1 fixture incl. guide system, fluid container and lower compression platen (156 mm Ø)



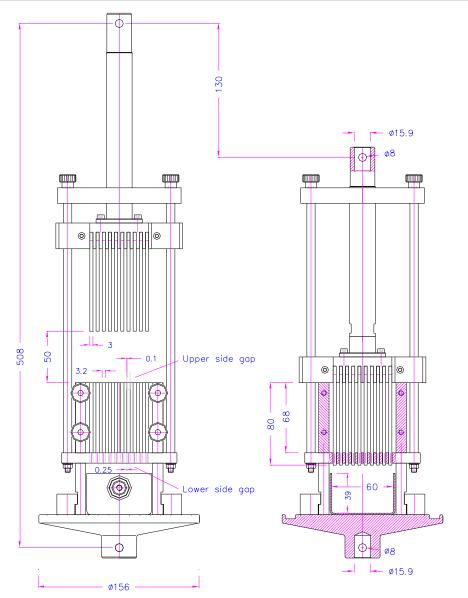


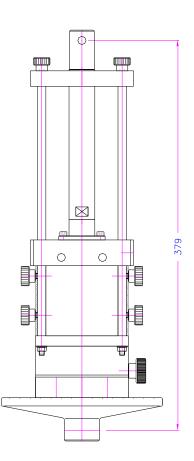



Examples for customized versions:

Item no.:	THS799-120-9B5X7
Max. load:	20 kN
Coupling:	Af159. Further couplings on request
Cell size:	120x120 mm
Blades:	9x 5 mm thick. Distance between blades: 7 mm
Material:	Stainless steel, aluminium, Plexiglas
Temperature range:	-30 +70°C (full stainless steel version: -80 +180°C)
Scope of supply:	1 fixture



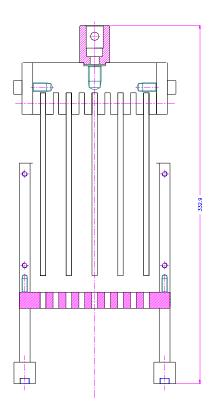

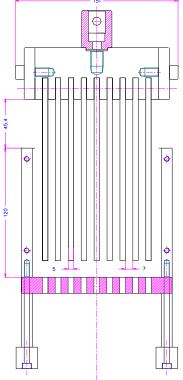

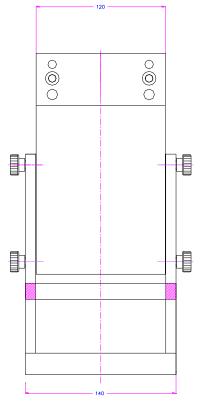





THS799-70-10B3x3+Gde





01.02.20220I